


LOW LOSS SUPER HIGH SPEED RECTIFIER

■ Outline drawings, mm

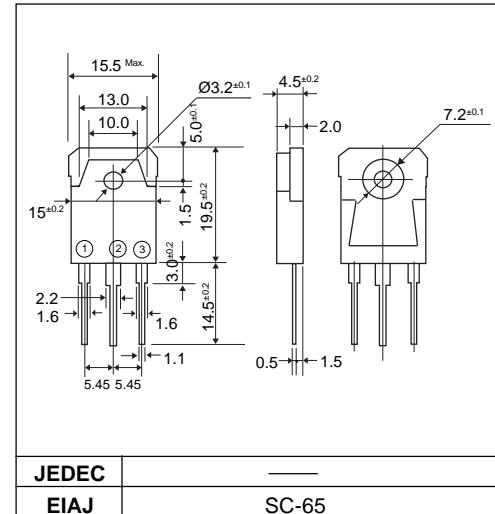

■ Features

- Low VF
- Super high speed switching
- High reliability by planer design


■ Applications

- High speed power switching

■ Maximum ratings and characteristics

- Absolute maximum ratings

■ Connection diagram

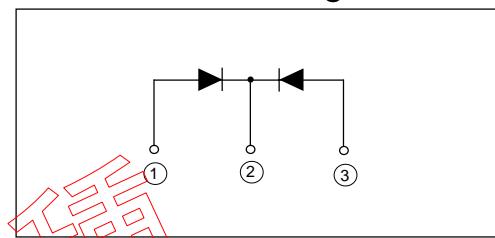

Item

Symbol

Conditions

Rating

Unit

| | | | | |
|---------------------------------|-----------|--|-------------|----|
| Repetitive peak reverse voltage | V_{RRM} | | 200 | V |
| Average output current | I_o | Square wave, duty=1/2, $T_c=115^\circ C$ | 20* | A |
| Surge current | I_{FSM} | Sine wave 10ms | 100 | A |
| Operating junction temperature | T_j | | -40 to +150 | °C |
| Storage temperature | T_{stg} | | -40 to +150 | °C |


* Average forward current of centertap full wave connection

- Electrical characteristics ($T_a=25^\circ C$ Unless otherwise specified)


| Item | Symbol | Conditions | Max. | Unit |
|-----------------------|---------------|-------------------------------------|------|---------|
| Forward voltage drop | V_{FM} | $I_{FM}=10A$ | 0.95 | V |
| Reverse current | I_{RRM} | $V_R=V_{RRM}$ | 200 | μA |
| Reverse recovery time | t_{rr} | $I_f=0.1A, I_r=0.2A, I_{rec}=0.05A$ | 40 | ns |
| Thermal resistance | $R_{th(j-c)}$ | Junction to case | 1.5* | °C/W |

■ Characteristics


Forward characteristics

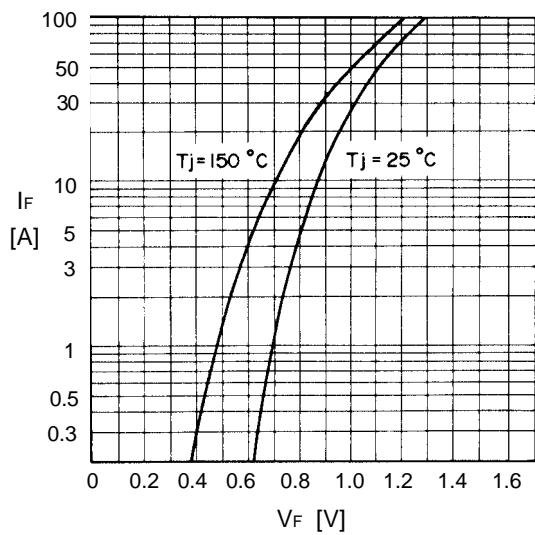


Reverse characteristics

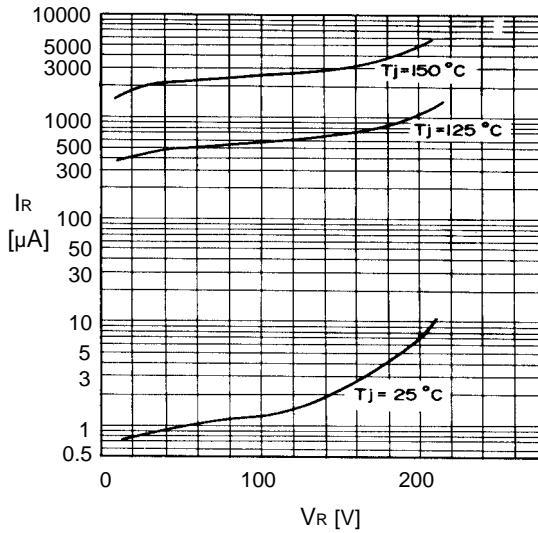


Forward power dissipation

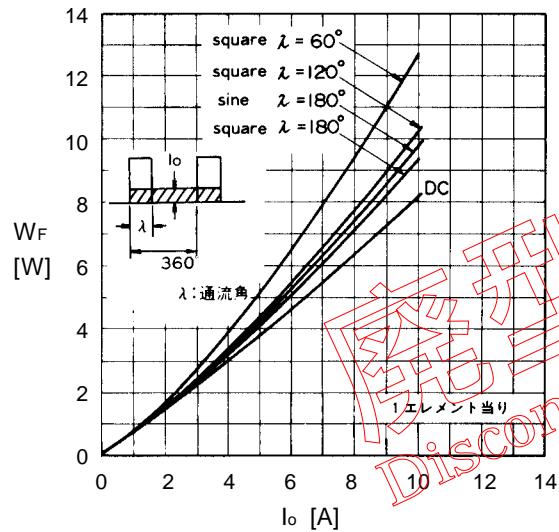


Output current-case temperature

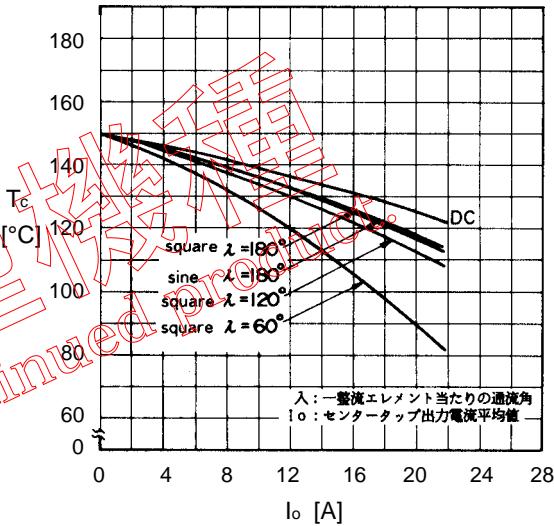


Junction capacitance characteristics

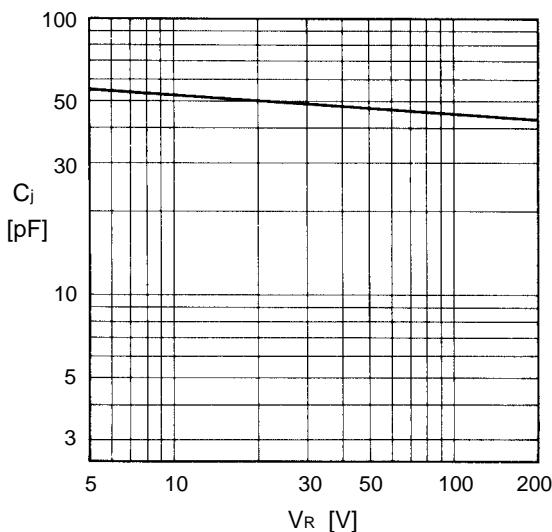

Surge capability

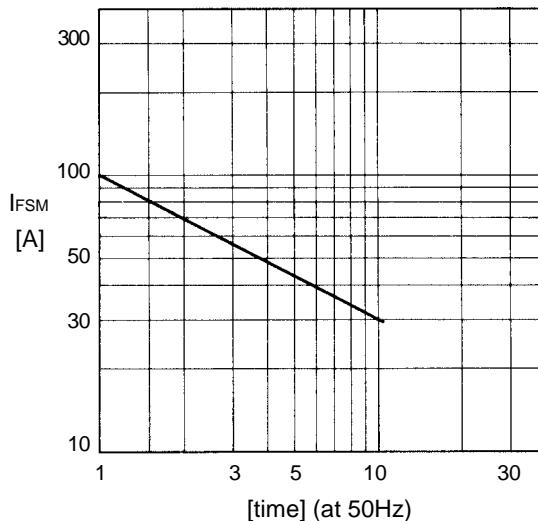

Transient thermal impedance

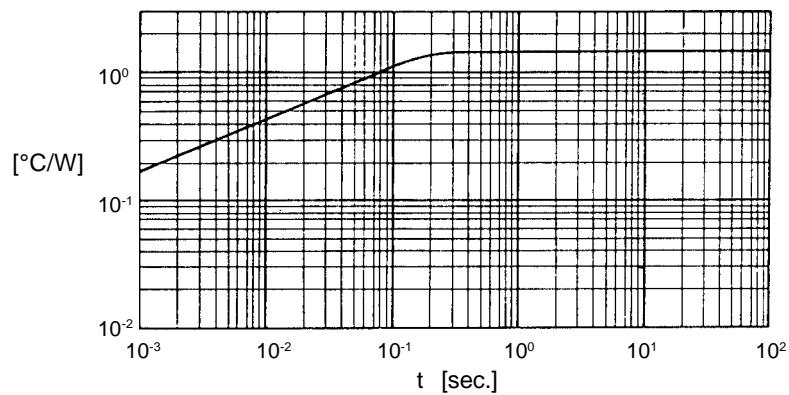

密型核子種
Discontinued product.